


Developmental grade Lumirror 10.56

Application

- Pre-cut lids
 - Dairy
 - Labels

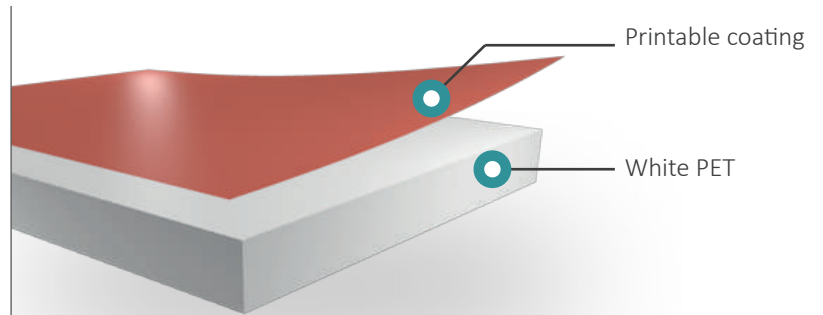

GLOSSY OPAQUE WHITE PET
FILM WITH ONE COATED SIDE

Benefits

- High gloss and white aspect
- Enhanced adhesion on the treated side
- High dimensional and thermal stability
- Improved adhesion of inks on treated side

Typical Values *(These values do not constitute binding specifications)*

Properties	Test Method	Unit	50 µm	55 µm	65 µm
YIELD					
Unit Weight		g/m ²	73.5	80.85	95.55
Area Yield		m ² /kg	13.6	12.4	10.5
MECHANICAL					
Tensile strength MD/TD	ASTM D 882	daN/mm ²	18/21	18/21	18/21
Elongation at Break MD/TD		%	100/90	100/90	100/90
THERMAL					
Shrinkage 150°C 30mn MD/TD	Internal Method	%	1.5/0.5	1.5/0.5	1.5/0.5
OPTICAL					
Total Light transmission	ASTM D1003		27	25	22
Gloss 60° (Coated side)	ASTM D523	%	60	60	60
Gloss 60° (Nonprintable side)			90	90	90
White index	ASTM E313		88	88	90
SURFACE					
Roughness Rz (Coated side)			580	580	580
Roughness Rz (Non printable side)	Internal Method	nm	520	520	520
Roughness Ra			40	40	40


Regulation

Lumirror® 10.56 complies with European legal requirements of food contact for lidding applications. For more details, please refer to the 'Declaration of Compliance'.

Presentation of the rolls

Roll packaging: The rolls are suspended on standard paper core with internal diameter of 152.8mm. For all presentation, minimum roll width = 340mm and maximum roll width = 2500mm.

Returnable packaging: Wooden flanges, plastic flanges and pallets are returnable. The treated side is identified on the roll label.



Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical values, measuring conditions, tolerances, deliveries...

Lumirror® is a registered trademark of Toray Films Europe SAS - TFE March 2019

DISCLAIMER: This leaflet is provided for informational purpose only and is not binding, nor can it constitute specifications to the buyer. The information contained in this document is based on numerous tests and trials we have carried out in our laboratories. Deviations from the results thus obtained can therefore be experienced depending on the actual conditions of use. This document does not provide any guarantee with regard to compliance of our product with the typical values indicated, nor does it provide any guarantee as the suitability of our products for any particular use.